

**MARSHALL**



2023

MARSHALL

# Registration





# 1.0 Registration Process

## Commissioning Guide

1. Go to <https://datamarshall.au>




2. Click the "Login" button.

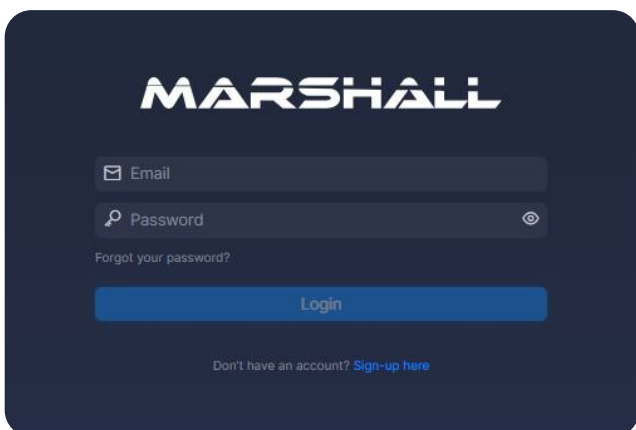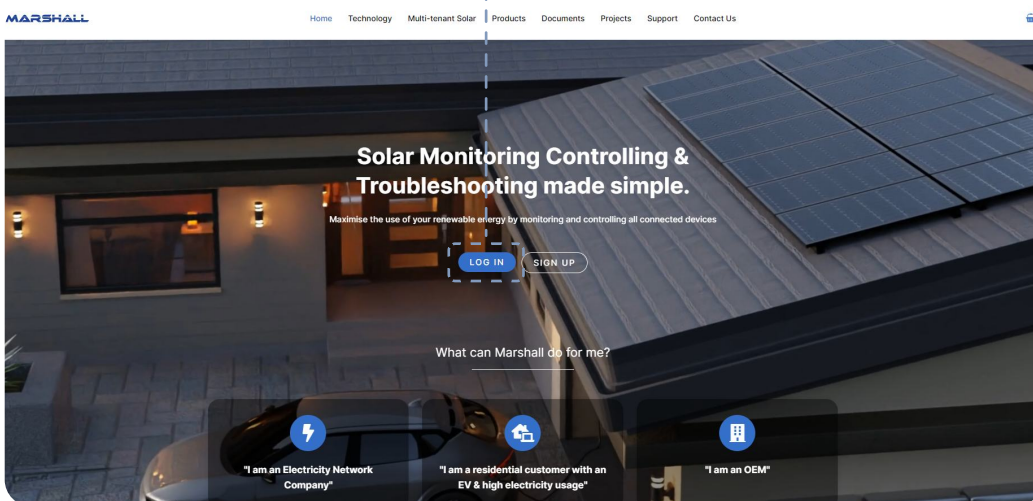


3. Log in using your Installer account.

4. Click “ + New Registration”.

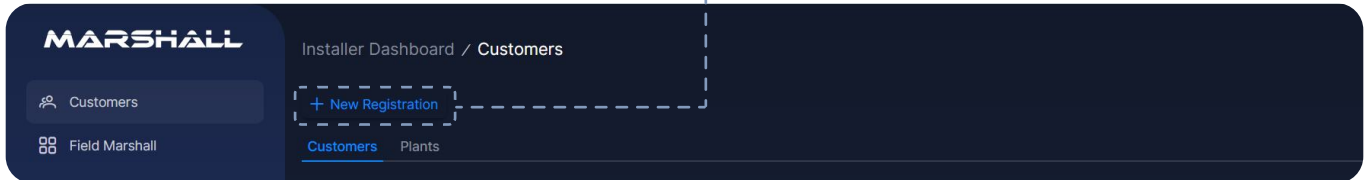

## Step 01 - Terms of Use


5.1. Read the [Data & Privacy Policy](#).

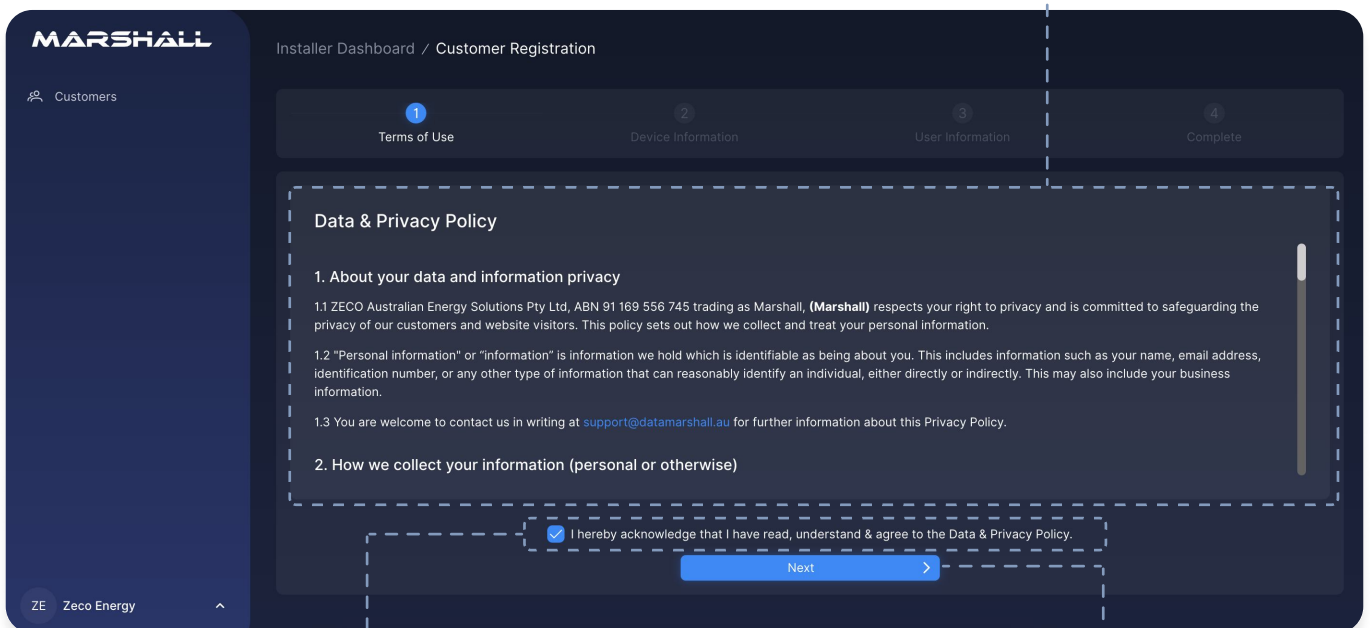

5.2. Click on the [checkbox](#) to acknowledge that you have read, understand and agree to the [Data & Privacy Policy](#).

5.3. Click the “Next” button.

## Step 02 - Device Information

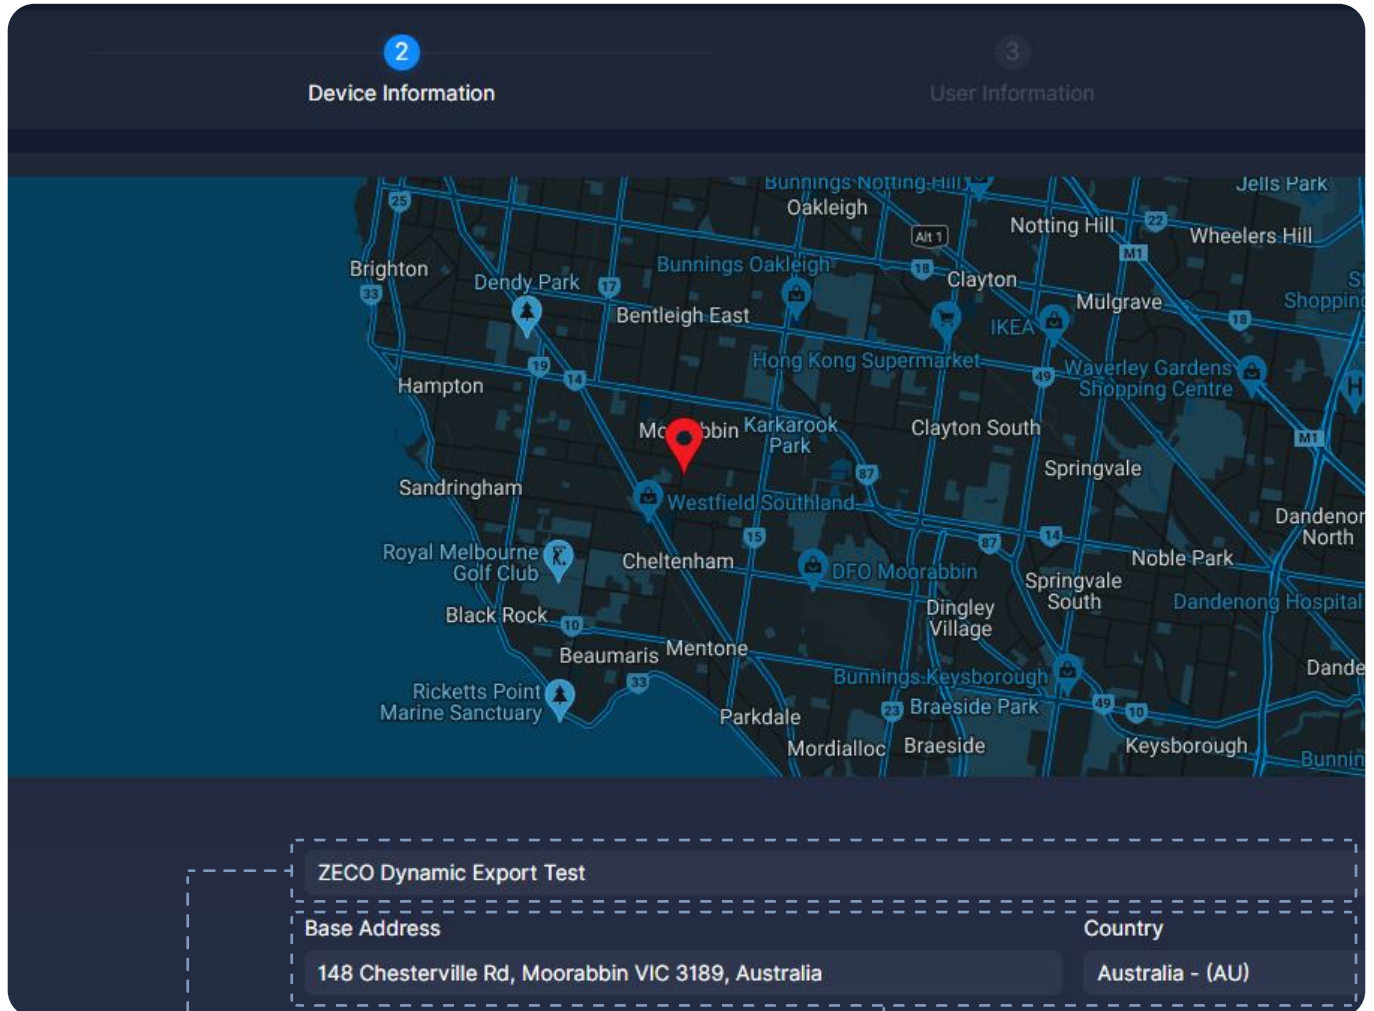

6.1. Enter a preferred "Plant Name".

6.2. Please enter the installation location on the "Base Address" bar.

Site NMI

Solutions

Site DNSP

Dynamic Export Control

SAPN

6.3. Enter Site NMI No.

6.5. If Dynamic Export Control is added, select the Site DNSP.

6.4. Select the preferred Solution.

Site NMI

Solutions

Site DNSP

Export control limit (W) MARSHALL

Fixed Export Control

MARSHALL

0

6.6. If Fixed Export Control is added, select the Site DNSP as Marshall and provide a value for Export control limit.

**Device Information**

Marshall Serial Numbers

1000000043a0d5db|

1000000043a0d5db

6.7. Select the **Serial Numbers** of parent devices.

**Marshall Garrison**

Parent Devices 1000000014d05899, 1000000043a0d5db

**Parent Device #1 - 1000000014d05899**

Device	Power per phase, Phase R/W/B	CT Secondary Current Rating (A)	Serial No.
EV Charger - Delta AC Max	<a href="#">Edit</a>	<a href="#">Edit</a>	JV6214603511WE5

**Parent Device #2 - 1000000043a0d5db**

Device	Power per phase, Phase R/W/B	CT Secondary Current Rating (A)	Serial No.
Inverter - Primo 3.5-1	<a href="#">Edit</a>	<a href="#">Edit</a>	31432535
Inverter - Symo 4.5-3-M	<a href="#">Edit</a>	<a href="#">Edit</a>	32163543

6.8. Devices associated with the selected parent devices will be fetched here.

Details of the connected devices vs can be edited if required.

## Add Site Information

Site Information

Site Values for Grid, from

Site Values for PV, from

Site Values for AC Coupled Battery Power, from

Inverter#1: Primo 3.5-1 - 31432535

Inverter#1: Primo 3.5-1 - 31432535

Inverter#1: Primo 3.5-1 - 31432535

Prev Next

6.9. Select Devices that provide Site Values for Grid, PV and Battery

7.0. Click "Next" to add User Information.

## Step 03 - User Information

### Installation Location

8.1. Enter "Owner Name", "Owner Contact", "Owner Email", and "Apartment No.".

The screenshot shows a dark-themed mobile application interface for entering user information. At the top, there are four numbered steps: 1. Terms of Use, 2. Device Information, 3. User Information (highlighted with a blue circle), and 4. Complete. The main form area is titled "User Info #1" and contains several input fields: "Owner Name", "Owner Contact", "Owner Email", "Apartment No. / House No.", and "Device Allocation" (a dropdown menu). A blue button labeled "+ Add New User" is located at the bottom left of the form. At the bottom center, there are two blue navigation buttons: "Prev" with a left arrow and "Next" with a right arrow. Dashed lines connect the text instructions to the corresponding fields and buttons in the form.


8.3. Click + Add New User to add another user.

8.2. Allocate devices to user.

8.4. Click the "Next" button.



9.1. Check entered information before the registration gets completed.

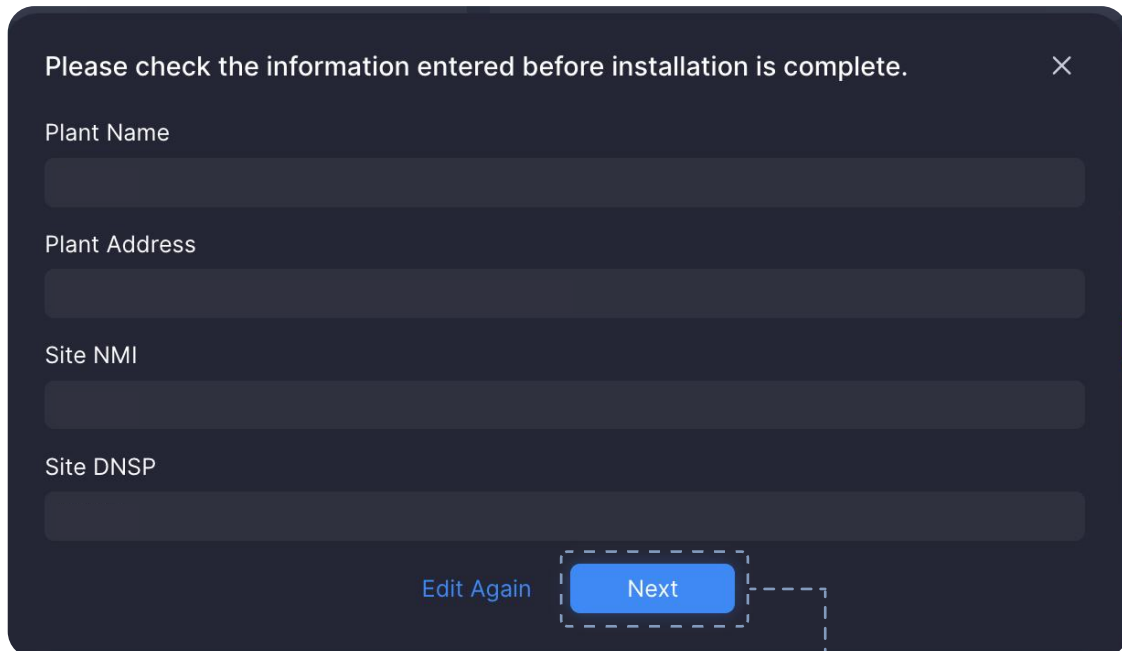

Please check the information entered before installation is complete. ✕

Plant Name


Plant Address

Site NMI

Site DNSP

[Edit Again](#) [Next](#)

A dashed box highlights the 'Next' button, with a dashed line extending downwards to the second form.

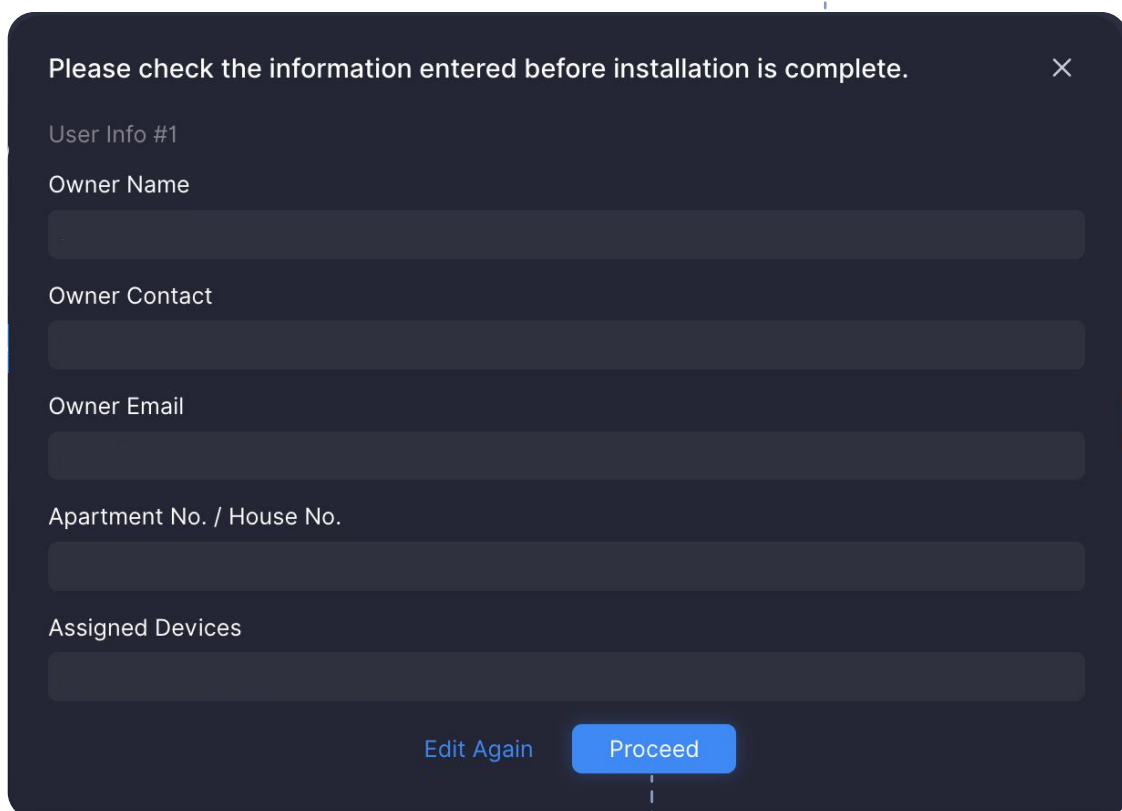

Please check the information entered before installation is complete. ✕

User Info #1

Owner Name

Owner Contact

Owner Email


Apartment No. / House No.

Assigned Devices

[Edit Again](#) [Proceed](#)

A dashed line extends upwards from the 'Proceed' button to the 'Next' button in the first form.

9.2. Click the "Proceed" button.

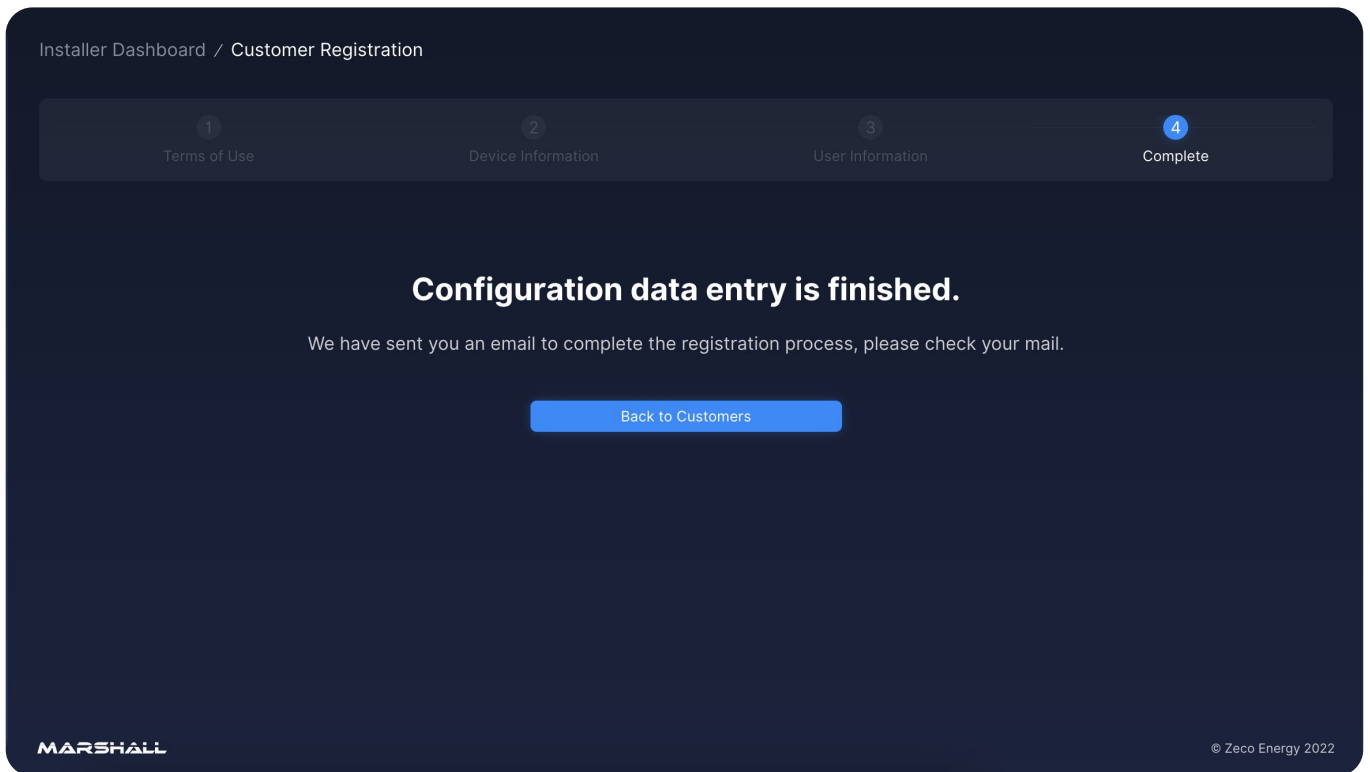

10.1. Once you finish entering data into the system, you will be **redirected** to this screen.

10.3. Simultaneously, the **Customer** will be invited to join Marshall Ecosystem via email.

10.4. The Customer may click on the **invitation link**.

10.5. When clicked, the Customer will be prompted to **reset the password**.

10.6. The Customer account will automatically be created upon **completion**.

**MARSHALL**

[datamarshall.au](http://datamarshall.au)

03 4422 4455

[support@datamarshall.au](mailto:support@datamarshall.au)

**ZECO Energy**

6C/148 Chesterville Road,  
Moorabbin  
VIC Australia 3189

A.B.N 16 111 222 456